

COMPACT[®] 10/12

Electric scissor lifts

- Compact[®] 10 :
990 lb (450 kg)
platform capacity.
- Compact[®] 12 :
660 lb (300 kg)
platform capacity.
- 3 ft (0.92 m)
platform extension.
- 5 in (13 cm) ground
clearance.
- Security system
with Pot Hole
protection.



ISO 9001
GROUP
PINGUELY
HAULOTTE



ARTICULATED BOOMS



VERTICAL MASTS



TELESCOPIC BOOMS



SCISSOR LIFTS



TRAILERS

Haulotte[®]

ON THE UP

COMPACT[®] 10/12

The Haulotte[®] advantages

- Compact[®] 10 : 990 lb (450 kg) platform capacity
- Compact[®] 12 : 660 lb (300 kg) platform capacity
- 47 in (1.20 m) width allows operation in the most congested areas
- 5 in (13 cm) ground clearance allows for both inside and outside use
- Pot Hole protection ensures maximum safety
- High operating autonomy
- Robust, reliable and easy to maintain design

STANDARD FEATURES



- Non marking tyres
- 3 ft (0.92 m) platform extension
- 3° tilt alarm
- 2 drive speeds
- 2 wheel drive and steer
- Free wheeling device
- 24 V - 4 x 6 V - 250 AH batteries
- 30 amp battery charger
- Battery charge indicator
- Hourmeter
- Towing hooks / lifting eyes
- Emergency lowering system

OPTIONS & ACCESSORIES

- Flashing light
- Motion alarm
- 220 V power line to platform
- Removable guardrails
- Collapsible handrails (Compact 10 : 1.81 m / 5 ft 9 in)
- Collapsible handrails (Compact 12 : 1.93 m / 6 ft 3 in)



ELECTRIC SCISSOR LIFTS

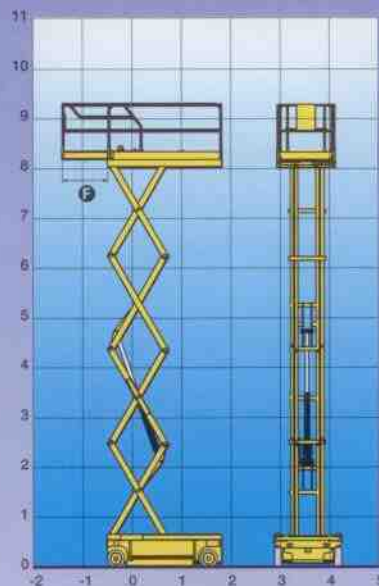

SPECIFICATIONS

	Compact [®] 10		Compact [®] 12	
Working height	33 ft 3 in	10.14 m	39 ft 4 in	12 m
Platform height	27 ft	8.14 m	33 ft	10 m
Platform capacity	990 lb	450 kg	660 lb	300 kg
A Stowed length	91 in	2.31 m	91 in	2.31 m
With access steps	95 in	2.42 m	95 in	2.42 m
B Width	47 in	1.20 m	47 in	1.20 m
C Stowed height (guardrails)	89 in	2.26 m	94 in	2.38 m
D Stowed height (platform)	45 in	1.14 m	50 in	1.26 m
E Wheelbase	6 ft 1 in	1.86 m	6 ft 1 in	1.86 m
Platform size	91 in x 47 in	2.3 m x 1.2 m	91 in x 47 in	2.3 m x 1.2 m
F Extension : Size		3 ft		0.92 m
Extension : Capacity	150 kg	330 lb		
Ground clearance	5 in	13 cm	5 in	13 cm
With deployed pothole	1 in	2.5 cm	1 in	2.5 cm
Drive speed	0.6 mph - 2.2 mph - 1 km/h - 3.5 km/h			
Inside turning radius	0	0	0	0
Outside turning radius	99 in	2.5 m	99 in	2.5 m
Lift / lower (sec.)	35/35 sec.	35/35 sec.	45/45 sec.	45/45 sec.
Gradeability	23%	23%	23%	23%
Controls	proportional	proportional	proportional	Proportional
Batteries (amp/h)	250	250	250	250
Tyres (solid / non marking)	15 x 5 x 2in - 38 x 13 x 5 cm			
Weight	4,740 lb	2,150 kg	5,511 lb	2,500 kg

SA ACCESS Equipment Pty Ltd
605-607 South Road
REGENCY PARK SA 5010
Phone (08) 8268 8444
Fax (08) 8268 9444



Haulotte[®]